

CONFIDENTIAL

Registry No.: _____
Delivered by hand - _____ 50X1

CLASSIFIED RECEIPT FORM

Date: 3/5/54 50X1

TO: _____ 50X1
FROM: _____ 50X1

I have personally received the CLASSIFIED material as identified below. I assume full responsibility for the safe handling, storage, and transmittal elsewhere of this material in accordance with existing regulations governing the handling of CLASSIFIED material. The CLASSIFIED material, including enclosures and attachments, is identified as follows:

CLASSIFICATION

DESCRIPTION

- 5 -

1 cy _____ ltr to Comdr of 578-1 50X1
dtd 5 Mar 54

ORIGINAL CL BY _____
☐ DECLASSIFIED BY _____
EXT BY _____ & YRS BY _____
REASON 3d(3)

DOC 68 REV DATE 11/04/80 BY SM952
ORIG COMP 035 OPI 56 TYPE 02
ORIG CLASS M PAGES 2 REV CLASS C
JUST 22 NEXT REV 2010 AUTH: _____


The original copy of this receipt must be signed personally by the addressee or his duly authorized representative and returned at once to the sender (address above)

Signed _____
For _____
Title _____
Date _____

Retain carbon for file.

UPON REMOVAL OF ATTACHED DOCUMENTS,
THIS RECEIPT MAY BE DOWNGRADED TO _____

CONFIDENTIAL

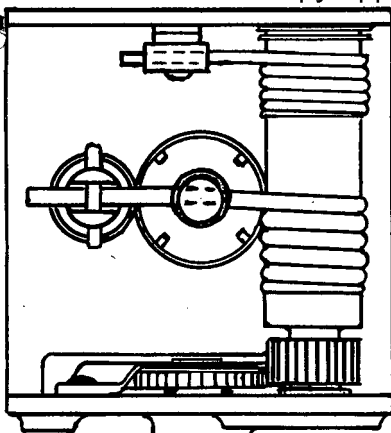

TYPES AVAILABLE

AM 100 as shown but with 5/8" shaft

AM 200 as shown but capable of high temperature operation

INPUT

115 VAC 1.8 ampere 60 cycle

OUTPUT

6 inch-pounds @ 30 RPM
No load speed 70 RPM

DUTY CYCLE


Intermittent, not to exceed 50:50 with maximum of 30 seconds on

FEATURES

Full power within 1/2 cycle of AC
Complete stop within less than 1/2 cycle AC. Motor is non-reversible

CONFIDENTIAL

FOUR MOUNTING HOLES
*8-32 TAP - MIN. 6 THREADS

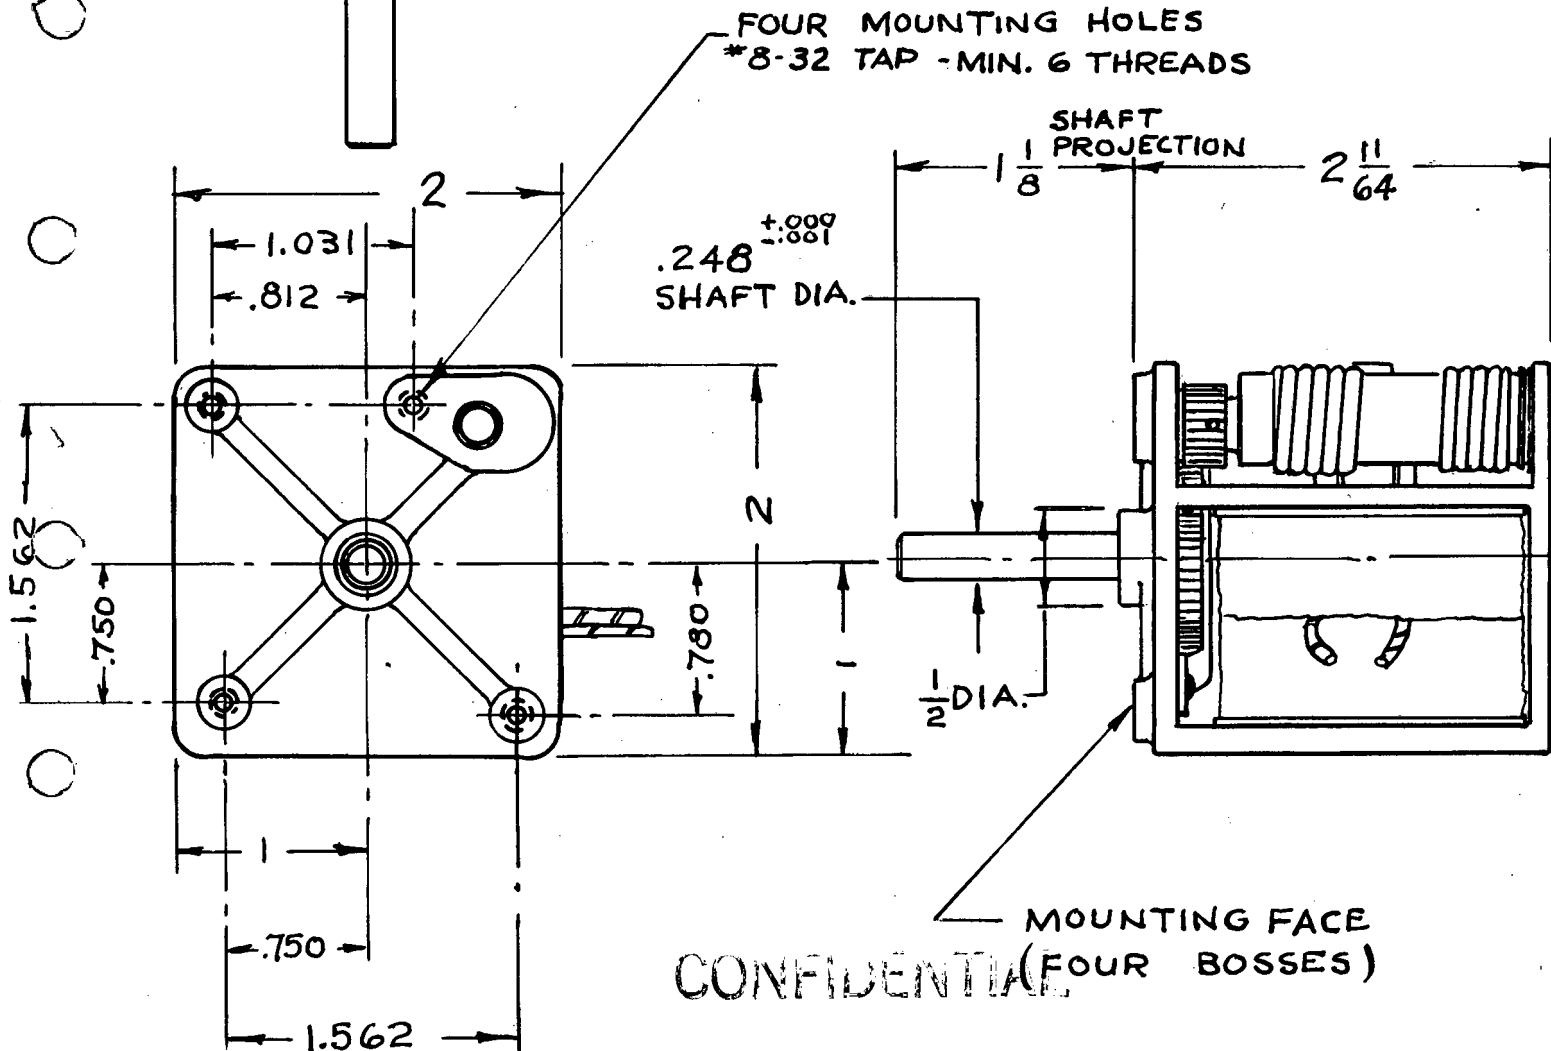

CONFIDENTIAL

Either the AM 100 or the AM 200 can be supplied for operation at any voltage level up to 220 VAC 60 cycles. The motor will operate from pulsating DC, while higher than 60 cycle operation can be obtained by half wave rectification of the input.